


IsoSafe

# ISF 330UL RA2RS

## 3x25A 400V 11kW

| | |
|---|---|
| PRODUCT NUMBER | 29425 |
| GTIN | 6419410294253 |
| E-NUMBER FI | 3662504 |
| ETIM CLASS | EC000216 |


## MEASUREMENTS

| | |
|---|---|
| HEIGHT | 258 mm |
| WIDTH | 120 mm |
| DEPTH | 113 mm |
| VOLUME | 3.4985 l |

## LOGISTICAL DATA

| | |
|---|---|
| PACKAGE SIZE 1 DEPTH | 113 mm |
| PACKAGE SIZE 1 HEIGHT | 258 mm |
| PACKAGE SIZE 1 WIDTH | 120 mm |
| PACKAGE SIZE 1 VOLUME | 3.4985 l |

## DIMENSIONAL DRAWING

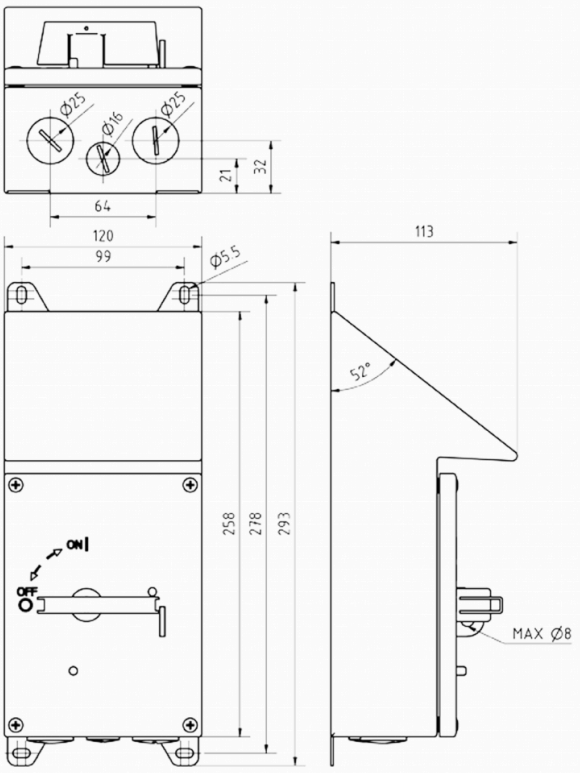


*We continuously improve our products; specifications, features and appearances may change without prior notice.*

KATKO IsoSafe

## TECHNICAL DATA

| | |
|---|---|
| NUMBER OF POLES | 3 |
| ENCLOSURE | RA2RS (120 x 258 x 113 mm) |
| ENCLOSURE TYPE | Stainless steel enclosure (AISI 316L) |
| UL | UL 60947-4-1A |
| EMC | No |
| ATEX | No |
| IP RATING | IP66 |
| NEMA | 4X |
| AMPERE RATING (600V) | 30 |
| HP 208V | 5 |
| HP 480V | 10 |
| HP 600V | 15 |
| SWITCH TYPE DESCRIPTION | Manual motor controller |
| WIRE SIZE (CU ONLY) | 14-8 AWG |

*We continuously improve our products; specifications, features and appearances may change without prior notice.*