


# ConnectSafe
# KL2X50M

| | |
|---|---|
| PRODUCT NUMBER | 33813 |
| GTIN | 6419410338131 |
| E-NUMBER FI | 1942152 |
| ETIM CLASS | EC000897 |


## MEASUREMENTS

| | |
|---|---|
| HEIGHT | 59.5 mm |
| WIDTH | 30.5 mm |
| DEPTH | 41.5 mm |
| VOLUME | 0.0753 l |

## LOGISTICAL DATA

| | |
|---|---|
| PACKAGE SIZE 1 | 18 |

## DIMENSIONAL DRAWING

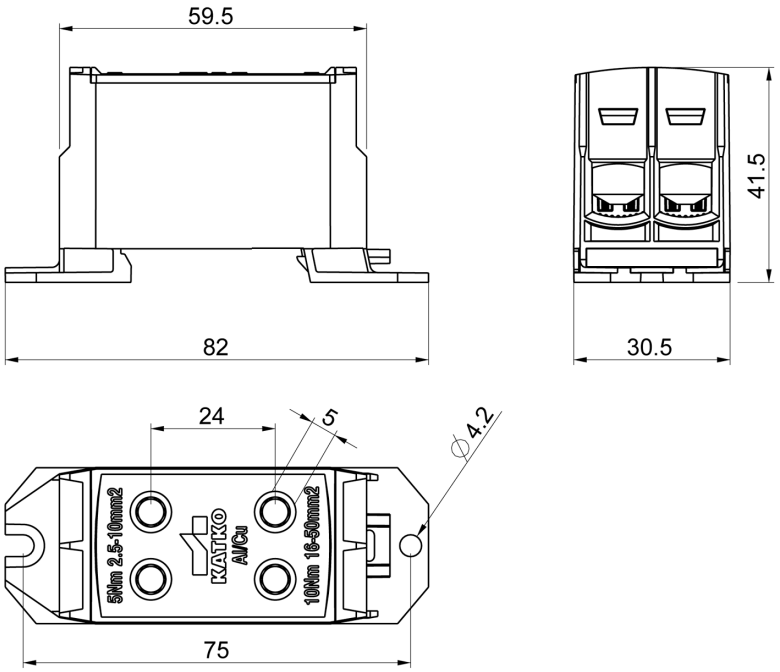


*We continuously improve our products; specifications, features and appearances may change without prior notice.*

KATKO ConnectSafe

## TECHNICAL DATA

| | |
|---|---|
| NUMBER OF POLES | 2 |
| ATEX | No |
| TORQUE AL/CU (NM) | 5 (2,5 – 16 $mm^2$) / 10 (25 – 50 $mm^2$) |
| KEY SIZE | Hex 5 |
| IN (AL) (A) | 200 |
| IN (CU) (A) | 320 |
| AL $MM^2$ | 2,5–50 |
| CU $MM^2$ | 2,5–50 |
| NOMINAL VOLTAGE | 1000V AC / 1500V DC |

*We continuously improve our products; specifications, features and appearances may change without prior notice.*