



PRODUCT NUMBER

44341

GTIN

6419410443415

ETIM CLASS

EC000216



## MEASUREMENTS

|        |        |
|--------|--------|
| HEIGHT | 200 mm |
| WIDTH  | 150 mm |
| DEPTH  | 120 mm |
| VOLUME | 3.6 l  |

## LOGISTICAL DATA

|                       |        |
|-----------------------|--------|
| SALES UNIT            | 1      |
| PACKAGE SIZE 1        | 1      |
| PACKAGE SIZE 1 DEPTH  | 120 mm |
| PACKAGE SIZE 1 HEIGHT | 200 mm |
| PACKAGE SIZE 1 WIDTH  | 150 mm |
| PACKAGE SIZE 1 VOLUME | 3.6 l  |

## DIMENSIONAL DRAWING

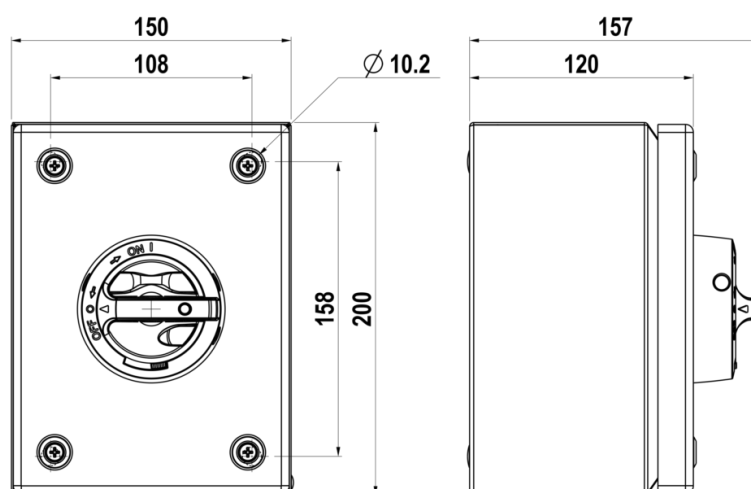

## TECHNICAL DATA

|                                                                                 |                         |
|---------------------------------------------------------------------------------|-------------------------|
| NUMBER OF POLES                                                                 | 1                       |
| ENCLOSURE                                                                       | T3 (150 x 200 x 120 mm) |
| ENCLOSURE TYPE                                                                  | Painted sheet steel     |
| EMC                                                                             | No                      |
| ATEX                                                                            | No                      |
| IP RATING                                                                       | IP66                    |
| RATED OPERATIONAL POWER, 1-PHASE 1500 RPM SQUIRREL-CAGE MOTOR AC-23A 240 V (KW) | 7.5                     |
| RATED INSULATION VOLTAGE, UI (V)                                                | 800                     |
| SWITCH TYPE DESCRIPTION                                                         | Isolating switch        |
| NOMINAL VALUES WITH CABLE SIZE (MM <sup>2</sup> )                               | 16                      |
| RATED THERMAL CURRENT, ITH (A)                                                  | 63                      |
| RATED THERMAL CURRENT (ENCLOSED), ITHE (A)                                      | 63                      |
| RATED OPERATIONAL CURRENT AC-23A 240 V, IE (A)                                  | 40                      |
| RATED FUSED SHORT-CIRCUIT CURRENT, BACK-UP FUSE OPTION 1 (A)                    | 40                      |
| RATED FUSED SHORT-CIRCUIT CURRENT, R.M.S. IQ OPTION 1 (KA)                      | 25                      |
| RATED FUSED SHORT-CIRCUIT CURRENT, PEAK VALUE (KA)                              | 4.5                     |
| RATED IMPULSE WITHSTAND VOLTAGE, UIMP (KV)                                      | 8                       |
| RATED SHORT-CIRCUIT MAKING CAPACITY, ICM 690 V (KA)                             | 1                       |
| RATED SHORT-TIME WITHSTAND CURRENT 1 S, ICW 690 V (KA)                          | 0.7                     |
| RATED BREAKING CAPACITY, AC-23A 415 V (A)                                       | 320                     |

|                                             |                   |
|---------------------------------------------|-------------------|
| ELECTRICAL ENDURANCE (NUMBER OF OPERATIONS) | 3000              |
| MECHANICAL ENDURANCE (NUMBER OF OPERATIONS) | 50000             |
| TERMINAL / BOLT SIZE CU (MM <sup>2</sup> )  | 1,5..16           |
| MAXIMUM TERMINAL TORQUE (NM)                | 1.8               |
| SWITCH TYPE                                 | Load Break Switch |