

KEA ENCLOSED ALUMINIUM SAFETY ISOLATORS / SWITCH DISCONNECTORS 16-40 A

KATKO's enclosed aluminium safety switch series is available in 16 A, 25 A, 32 A, and 40 A ratings, with 2-, 3-, and 4-pole configurations and front-operated black LKX50 handles.

The enclosures are made of high-quality aluminium, ensuring durability in both indoor and outdoor environments. Aluminium safety isolators are ideal for harsh weather and demanding conditions, offering excellent resistance against UV and many chemicals.




Isolators consist of our new KU Load Break Switch and integrated PE connectors, one in the cover and one at the bottom of the enclosure. 3-pole versions also include KL1X16N terminal block. The LoadSafe KU switches are VDE-approved and independently tested by third parties, ensuring compliance with international quality and safety standards.

KEY FEATURES:


- Wide operating temperature range
- Knockouts at the bottom of the enclosure
- Door interlock at ON condition
- Padlockable at OFF (Optional OFF & ON)
- IP65 rating
- IK08 (Degree of Mechanical Impact)
- Tested according to IEC 60947-3

TECHNICAL DETAILS:


Type	Product code	AC-21A	400 V	AC-22A	400 V	AC-23A	400 V	AC-23A	690 V	EAN code	Enclosure	Weight kg	
			415 V		415 V		415 V						
		690 V	690 V	690 V									
Ie / A			Ie / A	Ie / A	P / kW	Ie / A	P / kW						
KEA 216 A1	36710	25 A (240 V)		16 A (240 V)		16 A	3 kW (240V)			6419410367100	A1	0.68	
KEA 225 A1	36413	40 A (240 V)		25 A (240 V)		25 A	4 kW (240V)			6419410364130	A1	0.68	
KEA 232 A1	36414	40 A (240 V)		32 A (240 V)		32 A	5,5 kW (240V)			6419410364147	A1	0.68	
KEA 240 A1	36415	40 A (240 V)		40 A (240 V)		40 A	7,5 kW (240V)			6419410364154	A1	0.68	
KEA 316 A1	36416	25 A		16 A		16 A	7.5 kW		16 A	11 kW	6419410365434	A1	0.68
KEA 325 A1	36417	40 A		25 A		25 A	11 kW		25 A	22 kW	6419410364161	A1	0.68
KEA 332 A1	36418	40 A		32 A		32 A	15 kW		25 A	22 kW	6419410364178	A1	0.68
KEA 340 A1	36419	40 A		40 A		40 A	22 kW		25 A	22 kW	6419410364185	A1	0.68
KEA 416 A1	36711	25 A		16 A		16 A	7.5 kW		16 A	11 kW	6419410367117	A1	0.68
KEA 425 A1	36421	40 A		25 A		25 A	11 kW		25 A	22 kW	6419410364192	A1	0.71
KEA 432 A1	36423	40 A		32 A		32 A	15 kW		25 A	22 kW	6419410364215	A1	0.71
KEA 440 A1	36423	40 A		40 A		40 A	22 kW		25 A	22 kW	6419410364239	A1	0.71

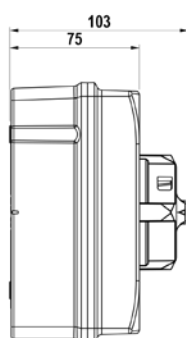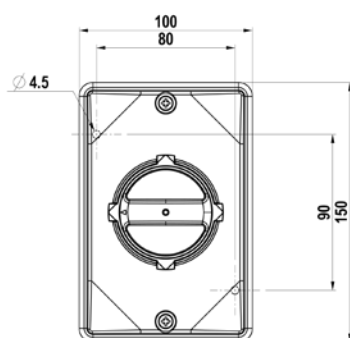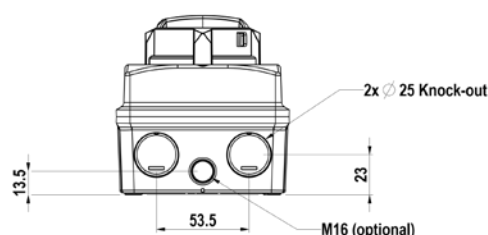

KU 1-3P + KL1X16N

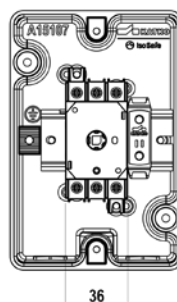

KU 4P / KU3PNO

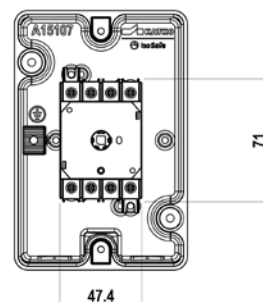

CONTACT US

E-mail:
customerservice@katko.com
Tel : +358 (0)9 849 600
www.katko.com