




## LoadSafe KU 340NO FP

3x40A 690V AC-22

|                |                  |
|----------------|------------------|
| PRODUCT NUMBER | 36464            |
| GTIN           | 6419410364642    |
| TECHNICAL NAME | 3x40A 690V AC-22 |
| ETIM CLASS     | EC000216         |


### MEASUREMENTS

NET WEIGHT 0.2037 kg

### LOGISTICAL DATA

SALES UNIT 1  
 PACKAGE SIZE 1 1  
 PACKAGE SIZE 1 0.2037 kg  
 WEIGHT

### DIMENSIONAL DRAWING

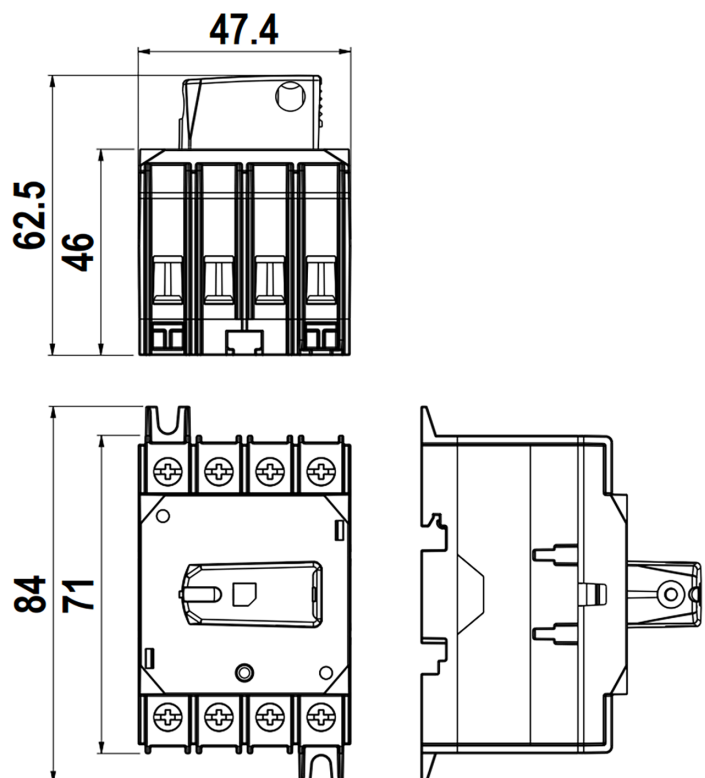

## TECHNICAL DATA

|  |     |
|--|-----|
| NUMBER OF POLES  | 3   |
| ATEX   | No  |
| RATED OPERATIONAL CURRENT<br>AC-23A 415 V, IE (A)                                      | 40  |
| RATED OPERATIONAL CURRENT<br>AC-23A 690 V, IE (A)                                      | 25  |
| RATED OPERATIONAL POWER, 3-<br>PHASE 1500 RPM SQUIRREL-CAGE<br>MOTOR AC-23A 690 V (KW) | 22  |
| RATED INSULATION VOLTAGE, UI<br>(V)  | 800 |
| NOMINAL VALUES WITH CABLE<br>SIZE (MM <sup>2</sup> )                                   | 16  |
| RATED THERMAL CURRENT, ITH<br>(A)  | 63  |
| RATED OPERATIONAL CURRENT<br>AC-21A 415 V, IE (A)                                      | 40  |
| RATED OPERATIONAL CURRENT<br>AC-21A 500 V, IE (A)                                      | 40  |
| RATED OPERATIONAL CURRENT<br>AC-21A 690 V, IE (A)                                      | 40  |
| RATED OPERATIONAL CURRENT<br>AC-22A 415 V, IE (A)                                      | 40  |
| RATED OPERATIONAL CURRENT<br>AC-22A 500 V, IE (A)                                      | 40  |
| RATED OPERATIONAL CURRENT<br>AC-22A 690 V, IE (A)                                      | 40  |
| RATED OPERATIONAL CURRENT<br>AC-23A 500 V, IE (A)                                      | 25  |
| RATED OPERATIONAL POWER, 3-<br>PHASE 1500 RPM SQUIRREL-CAGE<br>MOTOR AC-23A 415 V (KW) | 22  |

|   |                 |
|---|-----------------|
| RATED OPERATIONAL POWER, 3-PHASE 1500 RPM SQUIRREL-CAGE MOTOR AC-23A 500 V (KW) | 15              |
| RATED FUSED SHORT-CIRCUIT CURRENT, BACK-UP FUSE OPTION 1 (A)                    | 40              |
| RATED FUSED SHORT-CIRCUIT CURRENT, R.M.S. IQ OPTION 1 (KA)                      | 25              |
| RATED FUSED SHORT-CIRCUIT CURRENT, PEAK VALUE (KA)                              | 4.5             |
| RATED IMPULSE WITHSTAND VOLTAGE, UIMP (KV)                                      | 8               |
| RATED SHORT-CIRCUIT MAKING CAPACITY, ICM 690 V (KA)                             | 1               |
| RATED SHORT-TIME WITHSTAND CURRENT 1 S, ICW 690 V (KA)                          | 0.7             |
| RATED BREAKING CAPACITY, AC-23A 415 V (A)                                       | 320             |
| RATED BREAKING CAPACITY, AC-23A 500 V (A)                                       | 200             |
| RATED BREAKING CAPACITY, AC-23A 690 V (A)                                       | 200             |
| ELECTRICAL ENDURANCE (NUMBER OF OPERATIONS)                                     | 3000            |
| MECHANICAL ENDURANCE (NUMBER OF OPERATIONS)                                     | 50000           |
| TERMINAL / BOLT SIZE CU (MM <sup>2</sup> )                                      | 1,5..16         |
| MAXIMUM TERMINAL TORQUE (NM)  | 1.8             |
| SWITCH TYPE   | KU 340 / KU 440 |