

ConnectSafe
KL2X150N

PRODUCT NUMBER	37841
GTIN	6419410378410
E-NUMBER FI	1942059
ETIM CLASS	EC000897


MEASUREMENTS

HEIGHT	80 mm
WIDTH	52 mm
DEPTH	57 mm
VOLUME	0.2371 l
NET WEIGHT	0.3725 kg

LOGISTICAL DATA

PACKAGE SIZE 1	10
PACKAGE SIZE 1 WEIGHT	0.3725 kg

DIMENSIONAL DRAWING

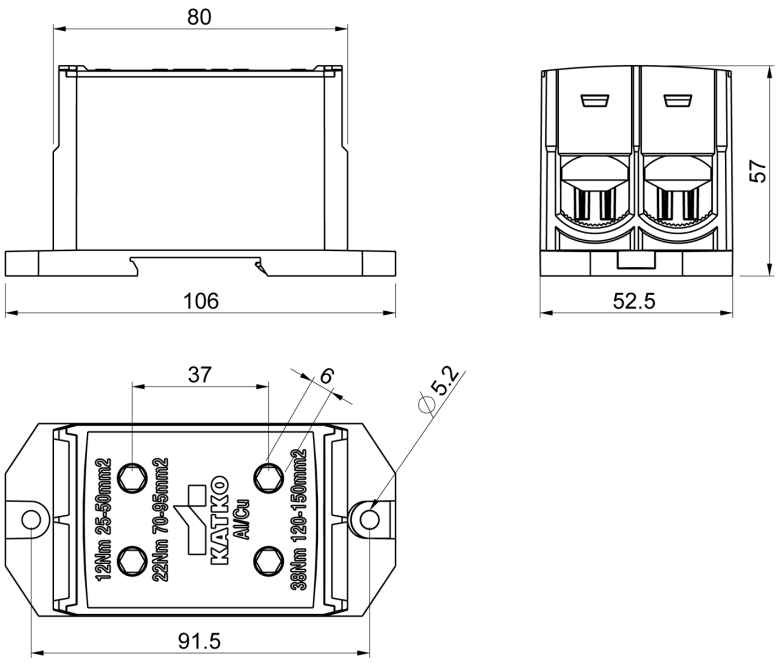

We continuously improve our products; specifications, features and appearances may change without prior notice.

KATKO ConnectSafe

TECHNICAL DATA

NUMBER OF POLES	2
UL	UL 1059, CAN/CSA C22.2 No. 158-10
ATEX	No
TORQUE AL/CU (NM)	12 (25 - 50 mm^2) / 22 (70 - 95 mm^2) / 38 (120 - 150 mm^2)
KEY SIZE	Hex 6
IN (AL) (A)	500
IN (CU) (A)	640
AL MM^2	25-150
CU MM^2	25-150
NOMINAL VOLTAGE	1000V AC / 1500V DC
LINE/LOAD WIRE SIZE-STR CU/AL (KCMIL/AWG)	300 - 2
TORQUE AL/CU LB-IN	110 (1/0 - 2 AWG) / 200 (4/0 - 2/0 AWG) / 340 (300 - 250 kcmil)
AMPERE AL (A)	460
AMPERE CU (A)	570

We continuously improve our products; specifications, features and appearances may change without prior notice.