
 FuseSafe

KKV 332

3x32 400V 15kW

PRODUCT NUMBER	21280
GTIN	6419410212806
E-NUMBER FI	3662022
ETIM CLASS	EC001040


MEASUREMENTS

HEIGHT	74 mm
WIDTH	58 mm
DEPTH	125 mm
VOLUME	0.5365 l
NET WEIGHT	0.3281 kg

LOGISTICAL DATA

SALES UNIT	1
PACKAGE SIZE 1	1
PACKAGE SIZE 1 DEPTH	125 mm
PACKAGE SIZE 1 HEIGHT	74 mm
PACKAGE SIZE 1 WIDTH	58 mm
PACKAGE SIZE 1 WEIGHT	0.3281 kg
PACKAGE SIZE 1 VOLUME	0.5365 l

DIMENSIONAL DRAWING

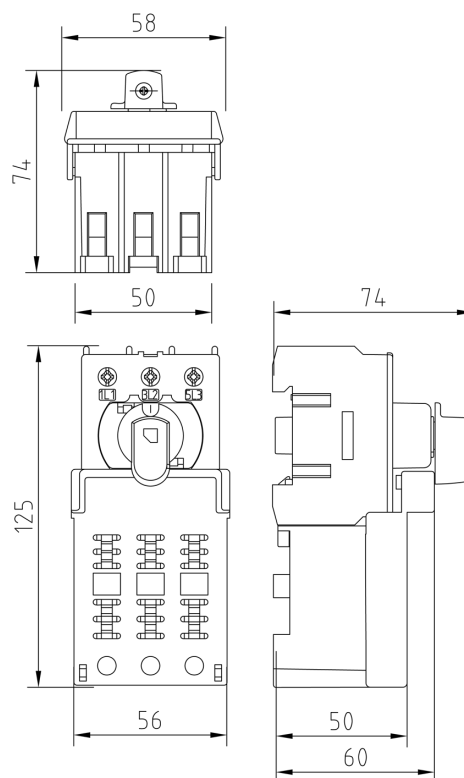

TECHNICAL DATA

NUMBER OF POLES	3
UL	UL 60947-4-1A
ATEX	No
RATED OPERATIONAL CURRENT AC-23A 415 V, IE (A)	32
RATED OPERATIONAL CURRENT AC-23A 690 V, IE (A)	32
RATED OPERATIONAL POWER, 3- PHASE 1500 RPM SQUIRREL-CAGE MOTOR AC-23A 690 V (KW)	30
RATED INSULATION VOLTAGE, UI (V)	800
AMPERE RATING (600V)	32
HP 208V	7.5
HP 240V	0
HP 415V	7.5
HP 480V	20
HP 600V	15
WIRE SIZE (CU ONLY)	14-8 AWG
NOMINAL VALUES WITH CABLE SIZE (MM ²)	6
RATED THERMAL CURRENT, ITH (A)	32
RATED OPERATIONAL CURRENT AC-21A 415 V, IE (A)	32
RATED OPERATIONAL CURRENT AC-21A 500 V, IE (A)	32
RATED OPERATIONAL CURRENT AC-21A 690 V, IE (A)	32
RATED OPERATIONAL CURRENT AC-22A 415 V, IE (A)	32
RATED OPERATIONAL CURRENT AC-22A 500 V, IE (A)	32

RATED OPERATIONAL CURRENT AC-22A 690 V, IE (A)	32
RATED OPERATIONAL CURRENT AC-23A 500 V, IE (A)	32
RATED OPERATIONAL POWER, 3- PHASE 1500 RPM SQUIRREL-CAGE MOTOR AC-23A 415 V (KW)	15
RATED OPERATIONAL POWER, 3- PHASE 1500 RPM SQUIRREL-CAGE MOTOR AC-23A 500 V (KW)	22
RATED FUSED SHORT-CIRCUIT CURRENT, BACK-UP FUSE OPTION 1 (A)	40
RATED FUSED SHORT-CIRCUIT CURRENT, R.M.S. IQ OPTION 1 (KA)	50
RATED FUSED SHORT-CIRCUIT CURRENT, PEAK VALUE (KA)	6
RATED IMPULSE WITHSTAND VOLTAGE, UIMP (KV)	8
RATED SHORT-CIRCUIT MAKING CAPACITY, ICM 690 V (KA)	2.5
RATED SHORT-TIME WITHSTAND CURRENT 1 S, ICW 690 V (KA)	1.7
RATED BREAKING CAPACITY, AC- 23A 415 V (A)	256
RATED BREAKING CAPACITY, AC- 23A 500 V (A)	256
RATED BREAKING CAPACITY, AC- 23A 690 V (A)	256
ELECTRICAL ENDURANCE (NUMBER OF OPERATIONS)	3000
MECHANICAL ENDURANCE (NUMBER OF OPERATIONS)	50000
TERMINAL / BOLT SIZE CU (MM ²)	1,5..16
MAXIMUM TERMINAL TORQUE (NM)	1.8
SWITCH TYPE	Switch Fuse