




IsoSafe KEA 332 A1

3x32A 400V 15kW

| | |
|----------------|-----------------|
| PRODUCT NUMBER | 36417 |
| GTIN | 6419410364178 |
| TECHNICAL NAME | 3x32A 400V 15kW |
| ETIM CLASS | EC000216 |


MEASUREMENTS

| | |
|------------|-----------|
| HEIGHT | 150 mm |
| WIDTH | 100 mm |
| DEPTH | 75 mm |
| VOLUME | 1.125 l |
| NET WEIGHT | 0.8045 kg |

LOGISTICAL DATA

| | |
|-----------------------|-----------|
| SALES UNIT | 1 |
| PACKAGE SIZE 1 | 1 |
| PACKAGE SIZE 1 WEIGHT | 0.8045 kg |

DIMENSIONAL DRAWING

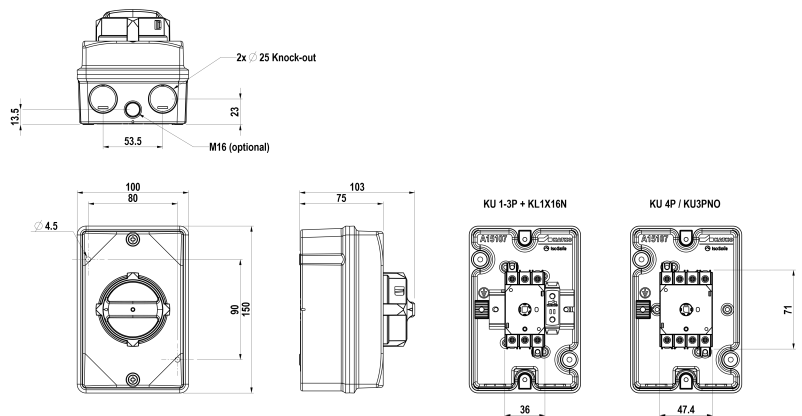

TECHNICAL DATA

| | |
|--|------------------------|
| NUMBER OF POLES | 3 |
| ENCLOSURE | A1 (100 x 150 x 75 mm) |
| ENCLOSURE TYPE | Aluminium |
| EMC | No |
| ATEX | No |
| RATED OPERATIONAL CURRENT AC-23A 415 V, IE (A) | 32 |
| RATED OPERATIONAL CURRENT AC-23A 690 V, IE (A) | 25 |
| RATED OPERATIONAL POWER, 3- PHASE 1500 RPM SQUIRREL-CAGE MOTOR AC-23A 690 V (KW) | 22 |
| RATED INSULATION VOLTAGE, UI (V) | 800 |
| SWITCH TYPE DESCRIPTION | Isolating switch |
| NOMINAL VALUES WITH CABLE SIZE (MM ²) | 10 |
| RATED THERMAL CURRENT, ITH (A) | 40 |
| RATED THERMAL CURRENT (ENCLOSED), ITHE (A) | 40 |
| RATED OPERATIONAL CURRENT AC-21A 415 V, IE (A) | 40 |
| RATED OPERATIONAL CURRENT AC-21A 500 V, IE (A) | 40 |
| RATED OPERATIONAL CURRENT AC-21A 690 V, IE (A) | 40 |
| RATED OPERATIONAL CURRENT AC-22A 415 V, IE (A) | 32 |
| RATED OPERATIONAL CURRENT AC-22A 500 V, IE (A) | 32 |
| RATED OPERATIONAL CURRENT AC-22A 690 V, IE (A) | 32 |

| | |
|--|-----------------|
| RATED OPERATIONAL CURRENT AC-23A 500 V, IE (A) | 25 |
| RATED OPERATIONAL POWER, 3- PHASE 1500 RPM SQUIRREL-CAGE MOTOR AC-23A 415 V (KW) | 15 |
| RATED OPERATIONAL POWER, 3- PHASE 1500 RPM SQUIRREL-CAGE MOTOR AC-23A 500 V (KW) | 15 |
| RATED FUSED SHORT-CIRCUIT CURRENT, BACK-UP FUSE OPTION 1 (A) | 40 |
| RATED FUSED SHORT-CIRCUIT CURRENT, R.M.S. IQ OPTION 1 (KA) | 25 |
| RATED FUSED SHORT-CIRCUIT CURRENT, PEAK VALUE (KA) | 4.5 |
| RATED IMPULSE WITHSTAND VOLTAGE, UIMP (KV) | 8 |
| RATED SHORT-CIRCUIT MAKING CAPACITY, ICM 690 V (KA) | 1 |
| RATED SHORT-TIME WITHSTAND CURRENT 1 S, ICW 690 V (KA) | 0.7 |
| RATED BREAKING CAPACITY, AC- 23A 415 V (A) | 256 |
| RATED BREAKING CAPACITY, AC- 23A 500 V (A) | 200 |
| RATED BREAKING CAPACITY, AC- 23A 690 V (A) | 200 |
| ELECTRICAL ENDURANCE (NUMBER OF OPERATIONS) | 3000 |
| MECHANICAL ENDURANCE (NUMBER OF OPERATIONS) | 50000 |
| TERMINAL / BOLT SIZE CU (MM ²) | 1,5..16 |
| MAXIMUM TERMINAL TORQUE (NM) | 1.8 |
| SWITCH TYPE | KU 340 / KU 440 |