

 FuseSafe

**KKV 325**

**3x40 400V 11kW**

|                |               |
|----------------|---------------|
| PRODUCT NUMBER | 21270         |
| GTIN           | 6419410212707 |
| E-NUMBER FI    | 3662021       |
| ETIM CLASS     | EC001040      |


## MEASUREMENTS

|            |           |
|------------|-----------|
| HEIGHT     | 74 mm     |
| WIDTH      | 58 mm     |
| DEPTH      | 125 mm    |
| VOLUME     | 0.5365 l  |
| NET WEIGHT | 0.3281 kg |

## LOGISTICAL DATA

|                       |           |
|-----------------------|-----------|
| SALES UNIT            | 1         |
| PACKAGE SIZE 1        | 1         |
| PACKAGE SIZE 1 DEPTH  | 125 mm    |
| PACKAGE SIZE 1 HEIGHT | 74 mm     |
| PACKAGE SIZE 1 WIDTH  | 58 mm     |
| PACKAGE SIZE 1 WEIGHT | 0.3281 kg |
| PACKAGE SIZE 1 VOLUME | 0.5365 l  |

## DIMENSIONAL DRAWING

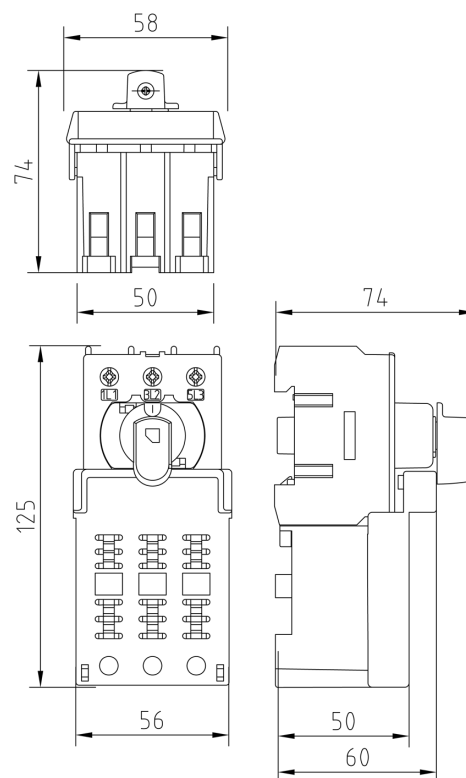

## TECHNICAL DATA

|                                                                                        |     |
|----------------------------------------------------------------------------------------|-----|
| NUMBER OF POLES                                                                        | 3   |
| ATEX                                                                                   | No  |
| RATED OPERATIONAL CURRENT<br>AC-23A 415 V, IE (A)                                      | 25  |
| RATED OPERATIONAL CURRENT<br>AC-23A 690 V, IE (A)                                      | 25  |
| RATED OPERATIONAL POWER, 3-<br>PHASE 1500 RPM SQUIRREL-CAGE<br>MOTOR AC-23A 690 V (KW) | 22  |
| RATED INSULATION VOLTAGE, UI<br>(V)                                                    | 800 |
| NOMINAL VALUES WITH CABLE<br>SIZE (MM <sup>2</sup> )                                   | 4   |
| RATED THERMAL CURRENT, ITH<br>(A)                                                      | 25  |
| RATED OPERATIONAL CURRENT<br>AC-21A 415 V, IE (A)                                      | 25  |
| RATED OPERATIONAL CURRENT<br>AC-21A 500 V, IE (A)                                      | 25  |
| RATED OPERATIONAL CURRENT<br>AC-21A 690 V, IE (A)                                      | 25  |
| RATED OPERATIONAL CURRENT<br>AC-22A 415 V, IE (A)                                      | 25  |
| RATED OPERATIONAL CURRENT<br>AC-22A 500 V, IE (A)                                      | 25  |
| RATED OPERATIONAL CURRENT<br>AC-22A 690 V, IE (A)                                      | 25  |
| RATED OPERATIONAL CURRENT<br>AC-23A 500 V, IE (A)                                      | 25  |
| RATED OPERATIONAL POWER, 3-<br>PHASE 1500 RPM SQUIRREL-CAGE<br>MOTOR AC-23A 415 V (KW) | 11  |

|                                                                                 |             |
|---------------------------------------------------------------------------------|-------------|
| RATED OPERATIONAL POWER, 3-PHASE 1500 RPM SQUIRREL-CAGE MOTOR AC-23A 500 V (KW) | 15          |
| RATED FUSED SHORT-CIRCUIT CURRENT, BACK-UP FUSE OPTION 1 (A)                    | 40          |
| RATED FUSED SHORT-CIRCUIT CURRENT, R.M.S. IQ OPTION 1 (KA)                      | 50          |
| RATED FUSED SHORT-CIRCUIT CURRENT, PEAK VALUE (KA)                              | 6           |
| RATED IMPULSE WITHSTAND VOLTAGE, UIMP (KV)                                      | 8           |
| RATED SHORT-CIRCUIT MAKING CAPACITY, ICM 690 V (KA)                             | 2.5         |
| RATED SHORT-TIME WITHSTAND CURRENT 1 S, ICW 690 V (KA)                          | 1.7         |
| RATED BREAKING CAPACITY, AC-23A 415 V (A)                                       | 200         |
| RATED BREAKING CAPACITY, AC-23A 500 V (A)                                       | 200         |
| RATED BREAKING CAPACITY, AC-23A 690 V (A)                                       | 200         |
| ELECTRICAL ENDURANCE (NUMBER OF OPERATIONS)                                     | 3000        |
| MECHANICAL ENDURANCE (NUMBER OF OPERATIONS)                                     | 50000       |
| TERMINAL / BOLT SIZE CU (MM <sup>2</sup> )                                      | 1,5..16     |
| MAXIMUM TERMINAL TORQUE (NM)                                                    | 1.8         |
| SWITCH TYPE                                                                     | Switch Fuse |