



 IsoSafe  
**KET 3800 T10A**

**3x800A 400V 400kW**

PRODUCT NUMBER	33836
GTIN	6419410338360
TECHNICAL NAME	3x800A 400V 400kW
ETIM CLASS	EC000216


### MEASUREMENTS

HEIGHT	1200 mm
WIDTH	600 mm
DEPTH	300 mm
VOLUME	216 l
NET WEIGHT	53.9328 kg

### LOGISTICAL DATA

SALES UNIT	1
PACKAGE SIZE 1	1
PACKAGE SIZE 1 DEPTH	200 mm
PACKAGE SIZE 1 HEIGHT	600 mm
PACKAGE SIZE 1 WIDTH	400 mm
PACKAGE SIZE 1 WEIGHT	53.9328 kg
PACKAGE SIZE 1 VOLUME	48 l

### DIMENSIONAL DRAWING

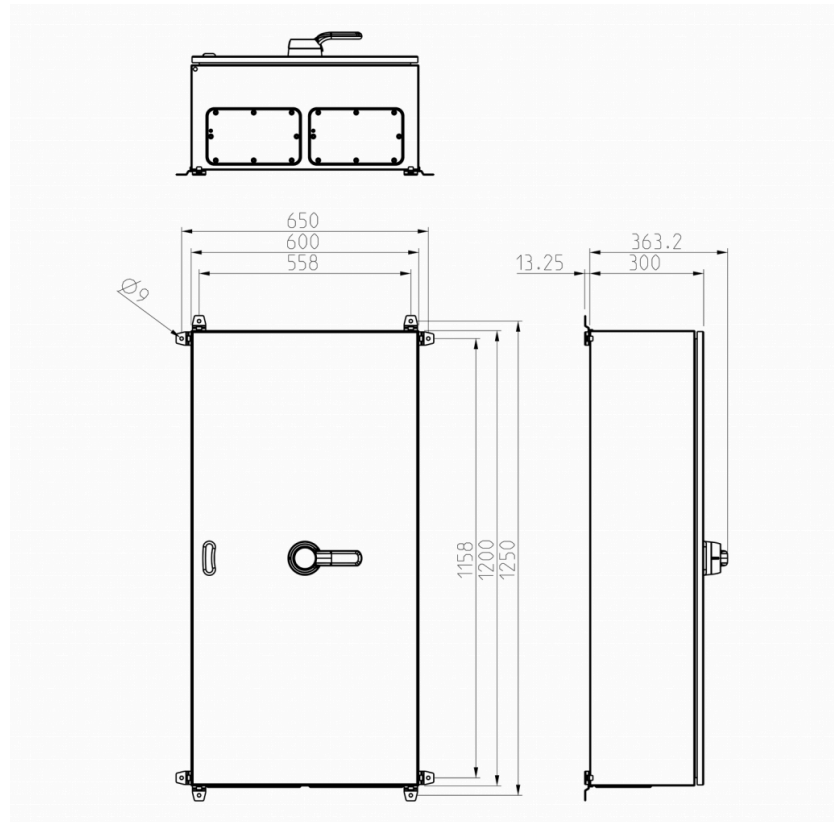

## TECHNICAL DATA

NUMBER OF POLES	3
ENCLOSURE	T10A (600 x 1200 x 300 mm)
ENCLOSURE TYPE	Painted sheet steel
EMC	No
ATEX	No
IP RATING	IP66
RATED OPERATIONAL CURRENT AC-23A 415 V, IE (A)	800
RATED OPERATIONAL CURRENT AC-23A 690 V, IE (A)	800
RATED OPERATIONAL POWER, 3- PHASE 1500 RPM SQUIRREL-CAGE MOTOR AC-23A 690 V (KW)	800
RATED INSULATION VOLTAGE, UI (V)	1000
SWITCH TYPE DESCRIPTION	Isolating switch
NOMINAL VALUES WITH CABLE SIZE (MM <sup>2</sup> )	2*300
RATED THERMAL CURRENT, ITH (A)	800
RATED THERMAL CURRENT (ENCLOSED), ITHE (A)	800
RATED OPERATIONAL CURRENT AC-21A 415 V, IE (A)	800
RATED OPERATIONAL CURRENT AC-21A 500 V, IE (A)	800
RATED OPERATIONAL CURRENT AC-21A 690 V, IE (A)	800
RATED OPERATIONAL CURRENT AC-22A 415 V, IE (A)	800
RATED OPERATIONAL CURRENT AC-22A 500 V, IE (A)	800
RATED OPERATIONAL CURRENT AC-22A 690 V, IE (A)	800

RATED OPERATIONAL CURRENT AC-23A 500 V, IE (A)	800
RATED OPERATIONAL CURRENT AC-23A 1000 V, IE (A)	400
RATED OPERATIONAL POWER, 3- PHASE 1500 RPM SQUIRREL-CAGE MOTOR AC-23A 415 V (KW)	400
RATED OPERATIONAL POWER, 3- PHASE 1500 RPM SQUIRREL-CAGE MOTOR AC-23A 500 V (KW)	560
RATED FUSED SHORT-CIRCUIT CURRENT, BACK-UP FUSE OPTION 1 (A)	800
RATED FUSED SHORT-CIRCUIT CURRENT, R.M.S. IQ OPTION 1 (KA)	100
RATED FUSED SHORT-CIRCUIT CURRENT, PEAK VALUE (KA)	76
RATED IMPULSE WITHSTAND VOLTAGE, UIMP (KV)	12
RATED SHORT-CIRCUIT MAKING CAPACITY, ICM 690 V (KA)	60
RATED SHORT-TIME WITHSTAND CURRENT 1 S, ICW 1000 V (KA)	28
RATED BREAKING CAPACITY, AC- 23A 415 V (A)	6400
RATED BREAKING CAPACITY, AC- 23A 500 V (A)	6400
RATED BREAKING CAPACITY, AC- 23A 690 V (A)	6400
ELECTRICAL ENDURANCE (NUMBER OF OPERATIONS)	2000
MECHANICAL ENDURANCE (NUMBER OF OPERATIONS)	10000
TERMINAL / BOLT SIZE CU (MM <sup>2</sup> )	M12
MAXIMUM TERMINAL TORQUE (NM)	50..75
SWITCH TYPE	Load Break Switch