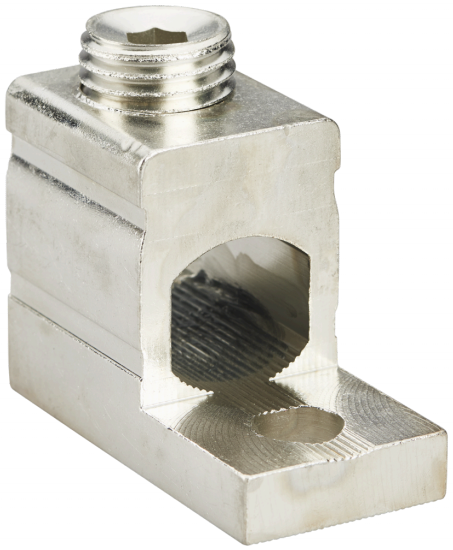


# ConnectSafe
# KKL1X240M8

| | |
|---|---|
| PRODUCT NUMBER | 22914 |
| GTIN | 6419410229149 |
| E-NUMBER FI | 1942146 |
| ETIM CLASS | EC000897 |


## MEASUREMENTS

| | |
|---|---|
| HEIGHT | 65 mm |
| WIDTH | 32 mm |
| DEPTH | 47 mm |
| VOLUME | 0.0978 l |
| NET WEIGHT | 0.2773 kg |

## LOGISTICAL DATA

| | |
|---|---|
| PACKAGE SIZE 1 | 16 |
| PACKAGE SIZE 1 WEIGHT | 0.2773 kg |

## DIMENSIONAL DRAWING

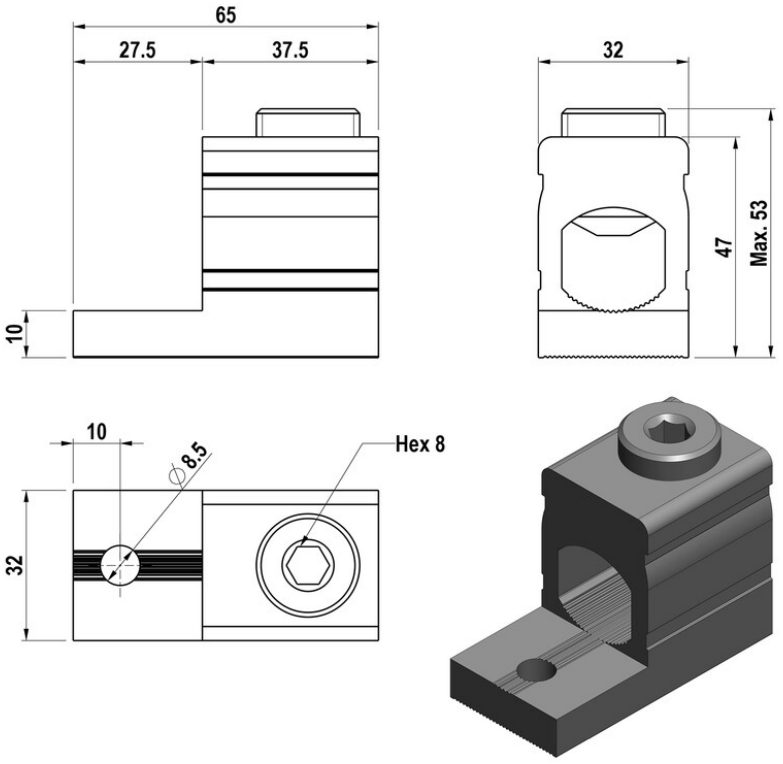


*We continuously improve our products; specifications, features and appearances may change without prior notice.*

KATKO ConnectSafe

## TECHNICAL DATA

| | |
|---|---|
| NUMBER OF POLES | 1 |
| ATEX | No |
| TORQUE AL/CU (NM) | 25 (35–120 $mm^2$) / 55 (150–240 $mm^2$) |
| KEY SIZE | Hex 8 |
| IN (AL) (A) | 315 |
| IN (CU) (A) | 425 |
| AL $MM^2$ | 35–240 |
| CU $MM^2$ | 35–240 |

*We continuously improve our products; specifications, features and appearances may change without prior notice.*