ConnectSafe

# KL1X16PE



| | |
|---|---|
| PRODUCT NUMBER | 48456 |
| GTIN | 6419410484562 |
| E-NUMBER FI | 1942128 |
| ETIM CLASS | EC000897 |


## MEASUREMENTS


| | |
|---|---|
| HEIGHT | 46.7 mm |
| WIDTH | 13.4 mm |
| DEPTH | 31.5 mm |
| VOLUME | 0.0197 l |
| NET WEIGHT | 0.02 kg |

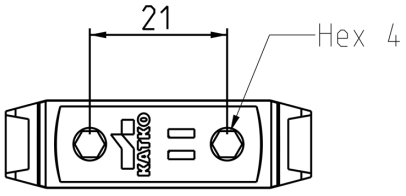
## LOGISTICAL DATA

| | |
|---|---|
| PACKAGE SIZE 1 | 60 |
| PACKAGE SIZE 1 WEIGHT | 0.02 kg |

## DIMENSIONAL DRAWING




*We continuously improve our products; specifications, features and appearances may change without prior notice.*

KATKO ConnectSafe

## TECHNICAL DATA

| | |
|---|---|
| NUMBER OF POLES | 1 |
| ATEX | No |
| TORQUE AL/CU (NM) | 5 |
| KEY SIZE | Hex 4 |
| IN (AL) (A) | 75 |
| IN (CU) (A) | 76 |
| AL $MM^2$ | 1,5-16 |
| CU $MM^2$ | 1,5-16 |
| NOMINAL VOLTAGE | 1000V AC / 1500V DC |

*We continuously improve our products; specifications, features and appearances may change without prior notice.*