


IsoSafe

# ISF 316NOUL M2

3x16A 400V 7.5kW

| | |
|---|---|
| PRODUCT NUMBER | 34483 |
| GTIN | 6419410344835 |
| E-NUMBER FI | 3662656 |
| ETIM CLASS | EC000216 |


## MEASUREMENTS

| | |
|---|---|
| HEIGHT | 130 mm |
| WIDTH | 96 mm |
| DEPTH | 104 mm |
| VOLUME | 1.2979 l |
| NET WEIGHT | 0.4693 kg |

## LOGISTICAL DATA

| | |
|---|---|
| PACKAGE SIZE 1 DEPTH | 104 mm |
| PACKAGE SIZE 1 HEIGHT | 130 mm |
| PACKAGE SIZE 1 WIDTH | 96 mm |
| PACKAGE SIZE 1 WEIGHT | 0.4693 kg |
| PACKAGE SIZE 1 VOLUME | 1.2979 l |

## DIMENSIONAL DRAWING

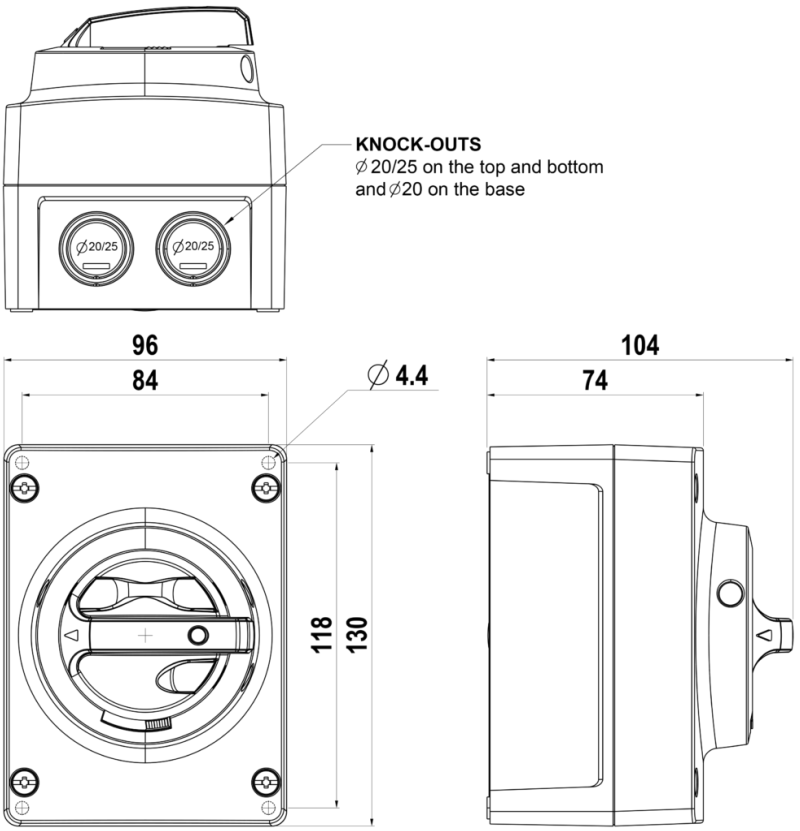


*We continuously improve our products; specifications, features and appearances may change without prior notice.*

KATKO IsoSafe

## TECHNICAL DATA

| | |
|---|---|
| NUMBER OF POLES | 3 |
| ENCLOSURE | M2 (96 x 130 x 74 mm) |
| ENCLOSURE TYPE | Polycarbonate |
| UL | UL 60947-4-1A |
| EMC | No |
| ATEX | No |
| IP RATING | IP66 |
| NEMA | 4X |
| AMPERE RATING (600V) | 16 |
| HP 208V | 3 |
| HP 480V | 7.5 |
| HP 600V | 10 |
| SWITCH TYPE DESCRIPTION | Manual motor controller |
| AUXILIARY CONTACT TYPE | 1NO |
| WIRE SIZE (CU ONLY) | 14-8 AWG |

*We continuously improve our products; specifications, features and appearances may change without prior notice.*